




**PLAN**  
SIDEWALKS AND DRIVEWAY APPROACHES ON RESIDENTIAL STREETS

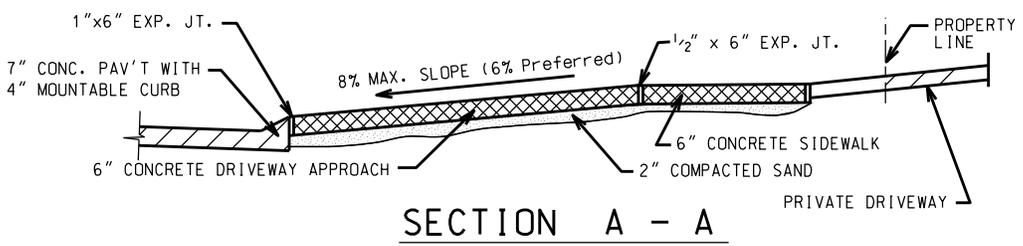


**SECTION A - A**

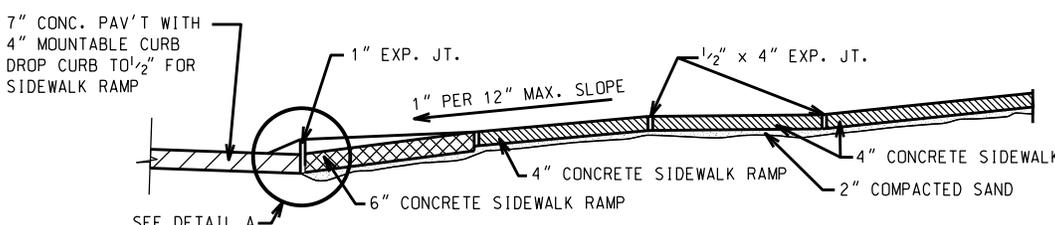


**SECTION B - B**

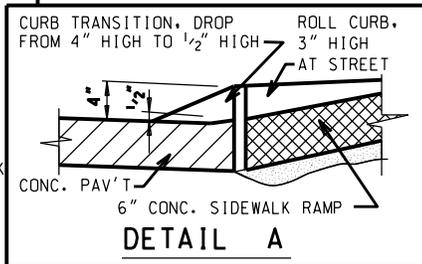

**DETAIL A**

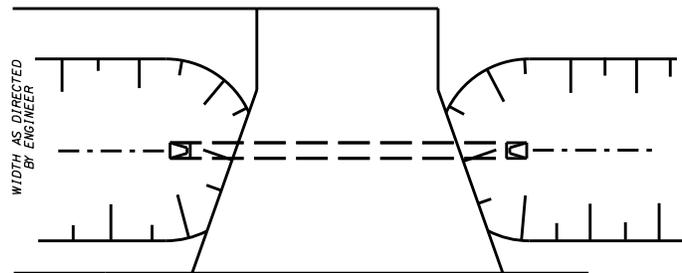

**TYPICAL CULVERT REPLACEMENT**

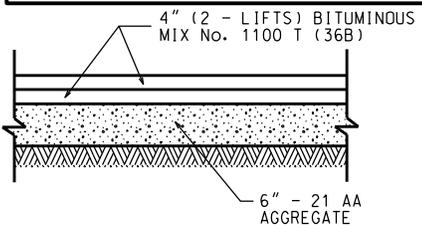

**BITUMINOUS CROSS SECTION**  
N.T.S.

The following information should be provided.

- Property line by locating existing lot corner irons
- Locations of expansion and contraction joint.
- Locations of 4" concrete and 6" concrete
- Location of 6" approach
- Sidewalk ramp Detail with the Curb transition drop to 1/2" high for sidewalk ramp (For corner lot) and Curb type

**CITY OF TROY**  
**ENGINEERING DEPT.**  
SIDEWALK AND  
DRIVEWAY APPROACH  
DETAILS

Revised: Sept 6, 2016